


Fixed Head Pedestals (Height Adjustable)

Our Fixed Head range of pedestal supports offers increased stability via an extra wide footprint. Starting at an ultra low 25mm high the range has a maximum height of 270mm. Able to support loads in excess of 1200kg, the support head is equipped with a non-slip, acoustic dampening rubber pad, offering even greater stability as well as noise reduction. Slope compensation is achieved through the use of angle correction shims installed under the base.

Benefits

- Economic low cost; high speed installation
- Super stable 320cm² smooth finish base.
- Height adjustment once paving installed via unique adjustment tool.
- Support head equipped with non-slip, acoustic dampening rubber pad.
- Supporting loads in excess 1200kg

- Height adjustment safety auto-lock mechanism.
- Temperature service range -30° to +120°C
- Resistant to atmospheric agents, acids and UV degradation.
- Height range 25mm—270mm.
- Installation directly on to single ply waterproof membranes.

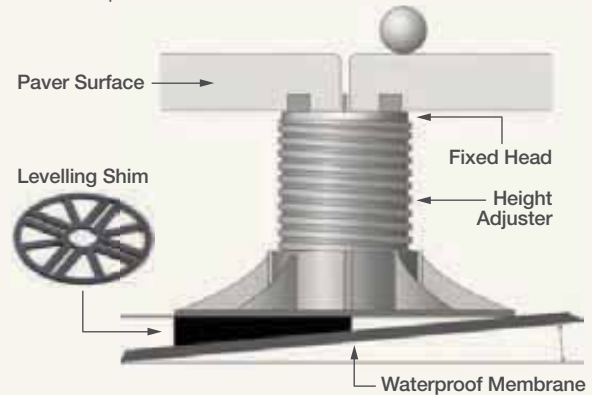

LEVATOPEDESTALS


Self Levelling Pedestals

The Self Levelling range of pedestal supports offers the same load bearing – in excess of 1200kgs – as the fixed head pedestal range, along with the same non-slip, acoustic support head and the ability to adjust the height of the floor after installation of the pavers, with the addition of an auto slope correction mechanism (self levelling system), allowing surfaces with up to 5% gradient, super fast shim free installation – even in areas with multiple falls. Height range 37.5mm – 550mm.

Benefits

- Self levelling/auto slope correction on surfaces with up to 5% or 1/20 gradient.
- Economic low cost; high speed installation.
- Height adjustment once paving installed via unique adjustment tool.
- Support head equipped with non-slip, acoustic dampening rubber pad.

- Supporting loads in excess 1200kg
- Height adjustment safety auto-lock mechanism.
- Temperature service range -30° to +120°C
- Resistant to atmospheric agents, acids and UV degradation.
- Height range 37.5mm–550mm.
- Installation directly on to single ply waterproof membranes.

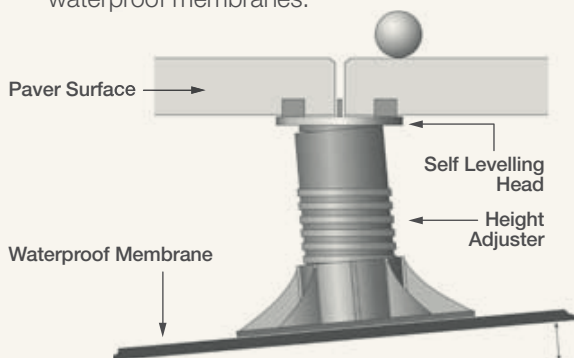

Paver Support Pad (Non Height Adjustable)

Paver support pads offer fast, ultra low cost installation – ideal for relatively even surfaces. Available in 3 heights 12mm, 15mm and 20mm high (enabling incremental levelling over surfaces with a fall). Fine adjustment of levelling is accomplished with rubber/plastic shims.



PSP1 12mm high, PSP2 15mm high, PSP3 20mm high

Fixed Head Pedestals (Height Adjustable)



Self Levelling Pedestals




Accessories



Height Adjustment Tool




Levelling Shim 150mm x 3mm



Paver Lift Tool



4mm Cross Spacer

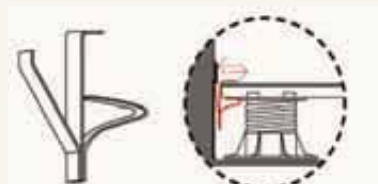

Tension spring available for Mono paver 20mm, and Duo Pavers at 26mm or 33mm